


SLK-94T

- fast quadrature counter, $f_{\text{inp.}} = 250 \text{ kHz}$
- 1 pulse quadrature counting input
- 2 programmable function inputs
- 4 relay (or OC) outputs
- programmable marker function

The **SLK-94T** counters are intended for tandem operation with the incremental encoders featuring quadrature outputs. The counters feature 4 relays (or OC outputs) with independently settable activation thresholds, which can be used to control external devices in one of two available operation modes. The counters also have 2 inputs with programmable function.

- fast quadrature input up to 250 kHz,
- 2 inputs with programmable function,
- 5 counter reset sources,
- automatic reset option,
- password protection,
- relays (or OC) operation time programmable to 99 min.,
- programmable multiplier, divider and offset (4 profiles),
- programmable decimal point position,
- ACCESS option - easy threshold modification,
- available with AC and DC power supply versions.

Exemplary pin assignment

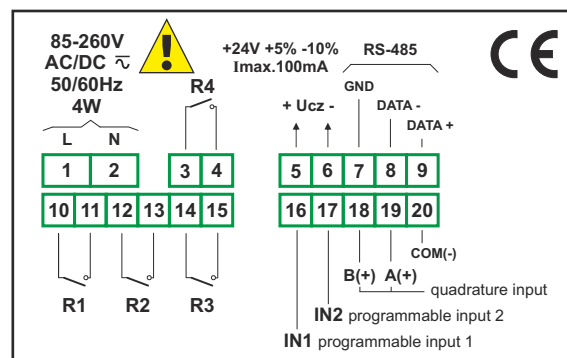

Ordering

SLK-94T-164X-1-X-XX1

options:

- 00 : no options
- 01 : IP 65 frame
- 08 : operating temp. $-20^{\circ}\text{C} \div +50^{\circ}\text{C}$

power supply:

- 3 : 24V AC/DC
- 4 : 85V - 260V AC/DC


type of outputs:

- 1 : REL
- 2 : OC



Typical applications

- Measuring the length of wound material plus control of the cutting knife actuator according to predefined parameters, control of the material travel drive and alarm signalling.

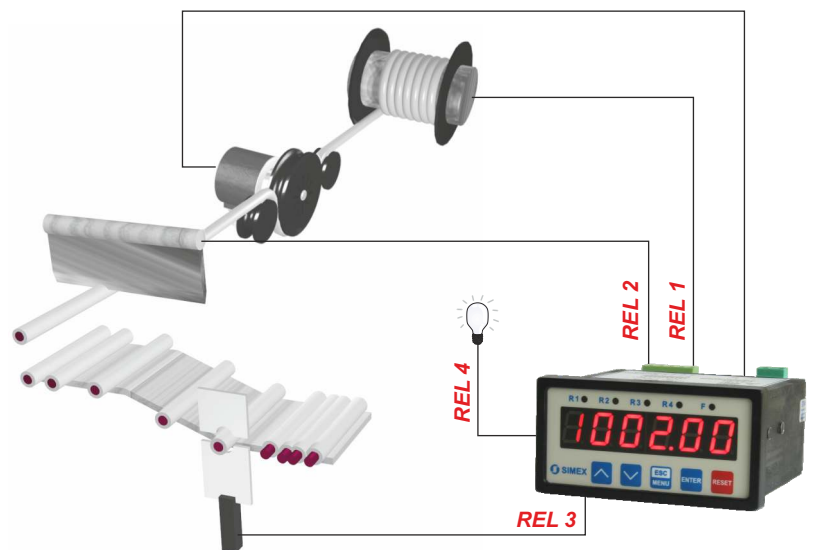

Technical data

Power supply: 19V $\pm$ 50V DC; 16V $\pm$ 35V AC or 85 $\pm$ 260V AC/DC, all separated

Power consumption: for 85 $\pm$ 260V AC/DC and 16V $\pm$ 35V AC power supply: max. 4,5 VA; 19V $\pm$ 50V DC power supply: max. 4,5 W

Display: LED, 6 x 13 mm high, red (green - on request)

Inputs: pulse, galvanically insulated

- A and B inputs - quadrature, counting
- IN1 input - programmable
- IN2 input - programmable
- COM input - common

Input levels: low: 0 V $\pm$ 1 V
high: 10 V $\pm$ 30 V (max. 12 mA for 24V)

Max. input frequency: 250 kHz

Displayed values range: current values counter -99999 $\pm$ 999999 $\pm$ decimal point
cycles counter ("normal" mode) 0 $\pm$ 999999
cycles counter ("marker" mode) -99999 $\pm$ 999999 $\pm$ decimal point
totalizer counter -99999999999 $\pm$ 99999999999

Outputs: 4 relays 1A/250V AC ($\cos\phi=1$) or the OC 30mA/30VDC/100mW

Transducer power supply output: 24V DC $\pm$ 5%, -10% / max. 100 mA, stabilized, not insulated from communication interface

Communication interface: RS-485, 8N1 and 8N2, 1200 bit/s $\pm$ 115200 bit/s, Modbus RTU (not galvanically insulated)

Data memory: non-volatile memory, EEPROM type

Operating temperature: $0^{\circ}\text{C} \div +50^{\circ}\text{C}$ (standard), $-20^{\circ}\text{C} \div +50^{\circ}\text{C}$ (option)

Storage temperature: $-10^{\circ}\text{C} \div +70^{\circ}\text{C}$ (standard), $-20^{\circ}\text{C} \div +70^{\circ}\text{C}$ (with option 08)

Protection class: IP 65 (front), available additional frame IP 65 for panel cut-out sealing; IP 20 (case and connection clips)

Case: board

Case material: NORYL - GFN2S E1

Case dimensions: 96 x 48 x 100 mm

Panel cut-out dimensions: 90,5 x 43 mm

Installation depth: min. 102 mm

Board thickness: max. 5 mm