


KERN ABJ120-4NM



The bestseller in analytical balances, with high-quality single-cell weighing system, also with EC type approval [M]

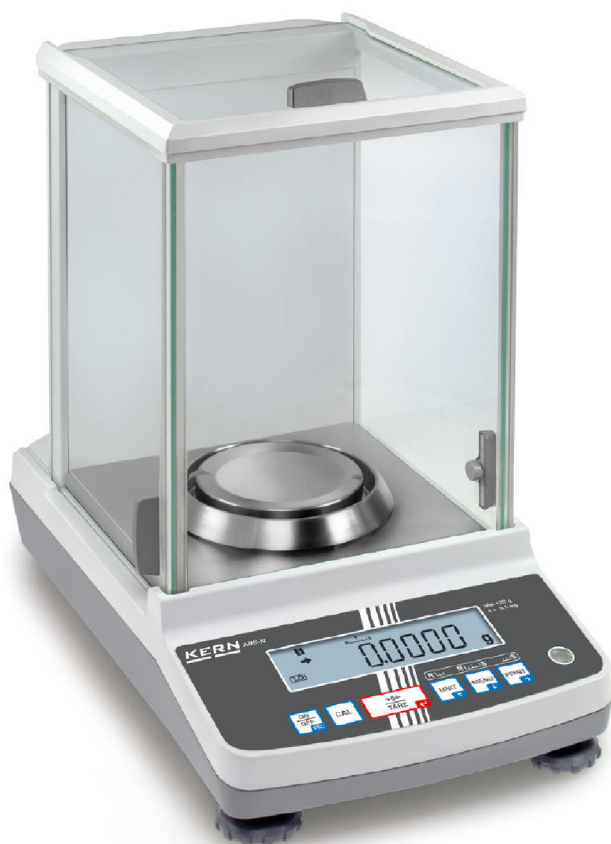

Counting

Counting resolution:	120000
Minimum piece weight at piece counting (Laboratory):	1 mg
Minimum piece weight at piece counting (Normal):	10 mg
Reference weight:	yes

Functions

Counting function:	yes
Function to save totals:	yes
Percentage determination:	yes
Standby function:	yes
Weighing with tolerance range:	yes

Environmental conditions

Maximum humidity:	85 %
Maximum operating temperature:	30 °C
Minimum ambient temperature:	10 °C
Minimum humidity:	20 %

Power supply

Input voltage:	110 V - 230 V AC
Mains adapter:	Mains adapter external
Mains adapter/adapter included:	UK US EURO CH

Service

DAkkS Certificate:	963-101
--------------------	---------

Category

Brand:	KERN
Category:	Balances
Product Group:	Analytical balance

Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	390 x 563 x 515 mm
Gross weight:	9,207 kg
Net weight:	6,271 kg
Shipping method:	Parcel service

Construction

Dimensions draft shield (WxDxH):	201 x 220 x 256 mm
Dimensions housing (WxDxH):	210 x 340 x 350 mm
Level indicator:	yes
Material weighing plate:	stainless steel
Revolving screw feet:	yes
Weighing space (WxDxH):	174 x 162 x 227 mm
Weighing surface (d):	91

Measuring system

Adjustment options:	Internal calibration (auto) Internal calibration (manual)
Linearity:	0,300 mg
Minimum weight (USP):	400 mg
Readability [d]:	0,100 mg
Repeatability:	0,200 mg
Resolution:	1.200.000
Stabilisation time under laboratory conditions:	3 s
Warm up time:	8 h
Weighing capacity [Max]:	120 g
Weighing units:	mg g ct

Display

Display digit height (large):	1,400 cm
-------------------------------	----------

Technical data about verification

Minimum load [Min]:	10 mg
Verification class:	I
Verification value [e]:	1 mg


KERN ABJ120-4NM




The bestseller in analytical balances, with high-quality single-cell weighing system, also with EC type approval [M]

Piktogramme

STANDARD

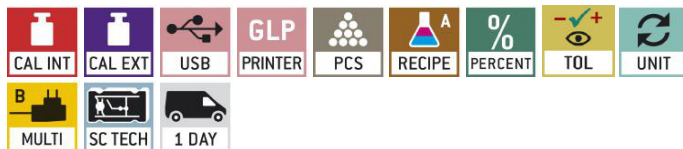

OPTION



FACTORY

