


KERN ABS80-4N

The bestseller in analytical balances, with high-quality single-cell weighing system, also with EC type approval [M]

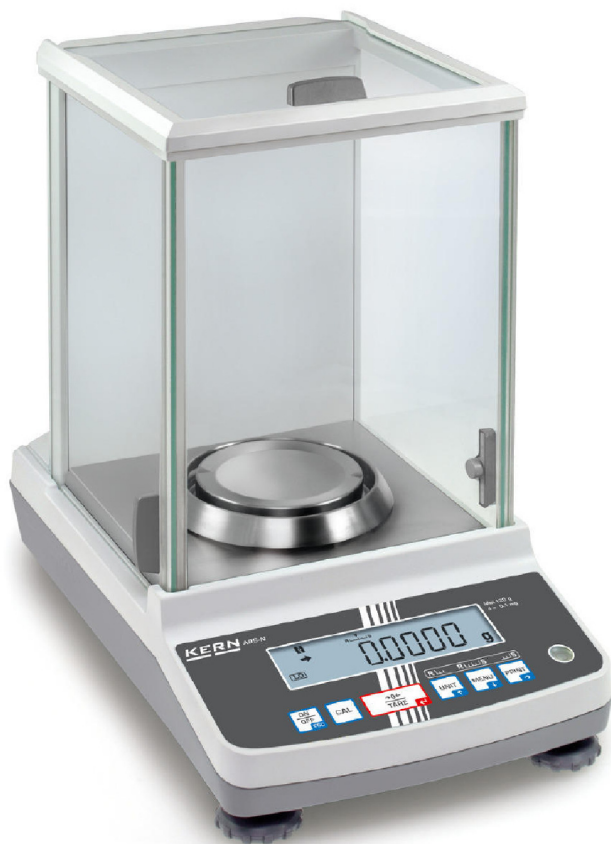

Reference weight: yes

Functions

Counting function:	yes
Function to save totals:	yes
Percentage determination:	yes
Standby function:	yes
Weighing with tolerance range:	yes

Environmental conditions

Maximum humidity:	85 %
Maximum operating temperature:	30 °C
Minimum ambient temperature:	10 °C
Minimum humidity:	20 %

Power supply

Input voltage:	110 V - 230 V AC
Mains adapter:	Mains adapter external
Mains adapter/adapter included:	UK US EURO CH

Service

DAkkS Certificate:	963-101
--------------------	---------

Category

Brand:	KERN
Category:	Balances
Product Group:	Analytical balance

Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	390 x 560 x 530 mm
Gross weight:	9 kg
Net weight:	6 kg
Shipping method:	Parcel service

Construction

Casing material:	Plastic
Dimensions draft shield (WxDxH):	201 x 220 x 256 mm
Dimensions housing (WxDxH):	210 x 340 x 325 mm
Level indicator:	yes
Material weighing plate:	stainless steel
Revolving screw feet:	yes
Weighing space (WxDxH):	174 x 162 x 227 mm
Weighing surface (d):	91

Measuring system

Adjustment options:	External calibration
Linearity:	0,300 mg
Minimum weight (USP):	400 mg
Readability [d]:	0,100 mg
Recommended adjusting weight:	80 g (E2)
Repeatability:	0,200 mg
Resolution:	820000
Stabilisation time under laboratory conditions:	3 s
Warm up time:	4 h
Weighing capacity [Max]:	82 g
Weighing units:	mg g ct

Display

Display digit height (large):	1,400 cm
-------------------------------	----------

Counting

Counting resolution:	82000
Minimum piece weight at piece counting (Laboratory):	1 mg
Minimum piece weight at piece counting (Normal):	10 mg


KERN ABS80-4N




The bestseller in analytical balances, with high-quality single-cell weighing system, also with EC type approval [M]

Piktogramme

STANDARD

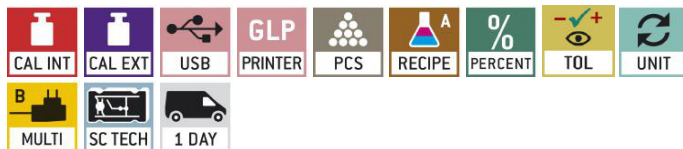

OPTION



FACTORY

